

DIRECT DRIVE 2-motor
FULL AUTOMATIC TURNTABLE

PL-530

S , ST (PL-530X/S)

Additional

Service Manual

The power supply assembly for the PL-530/S.ST and the PL-530X have been changed to PWR-826.


The following table shows the units which use the new power supply assembly.

	Serial No.
PL-530/S	18501 –
PL-530/ST	13301 –
PL-530X/S	14501 –

D



POWER SUPPLY ASSEMBLY(PWR-826)

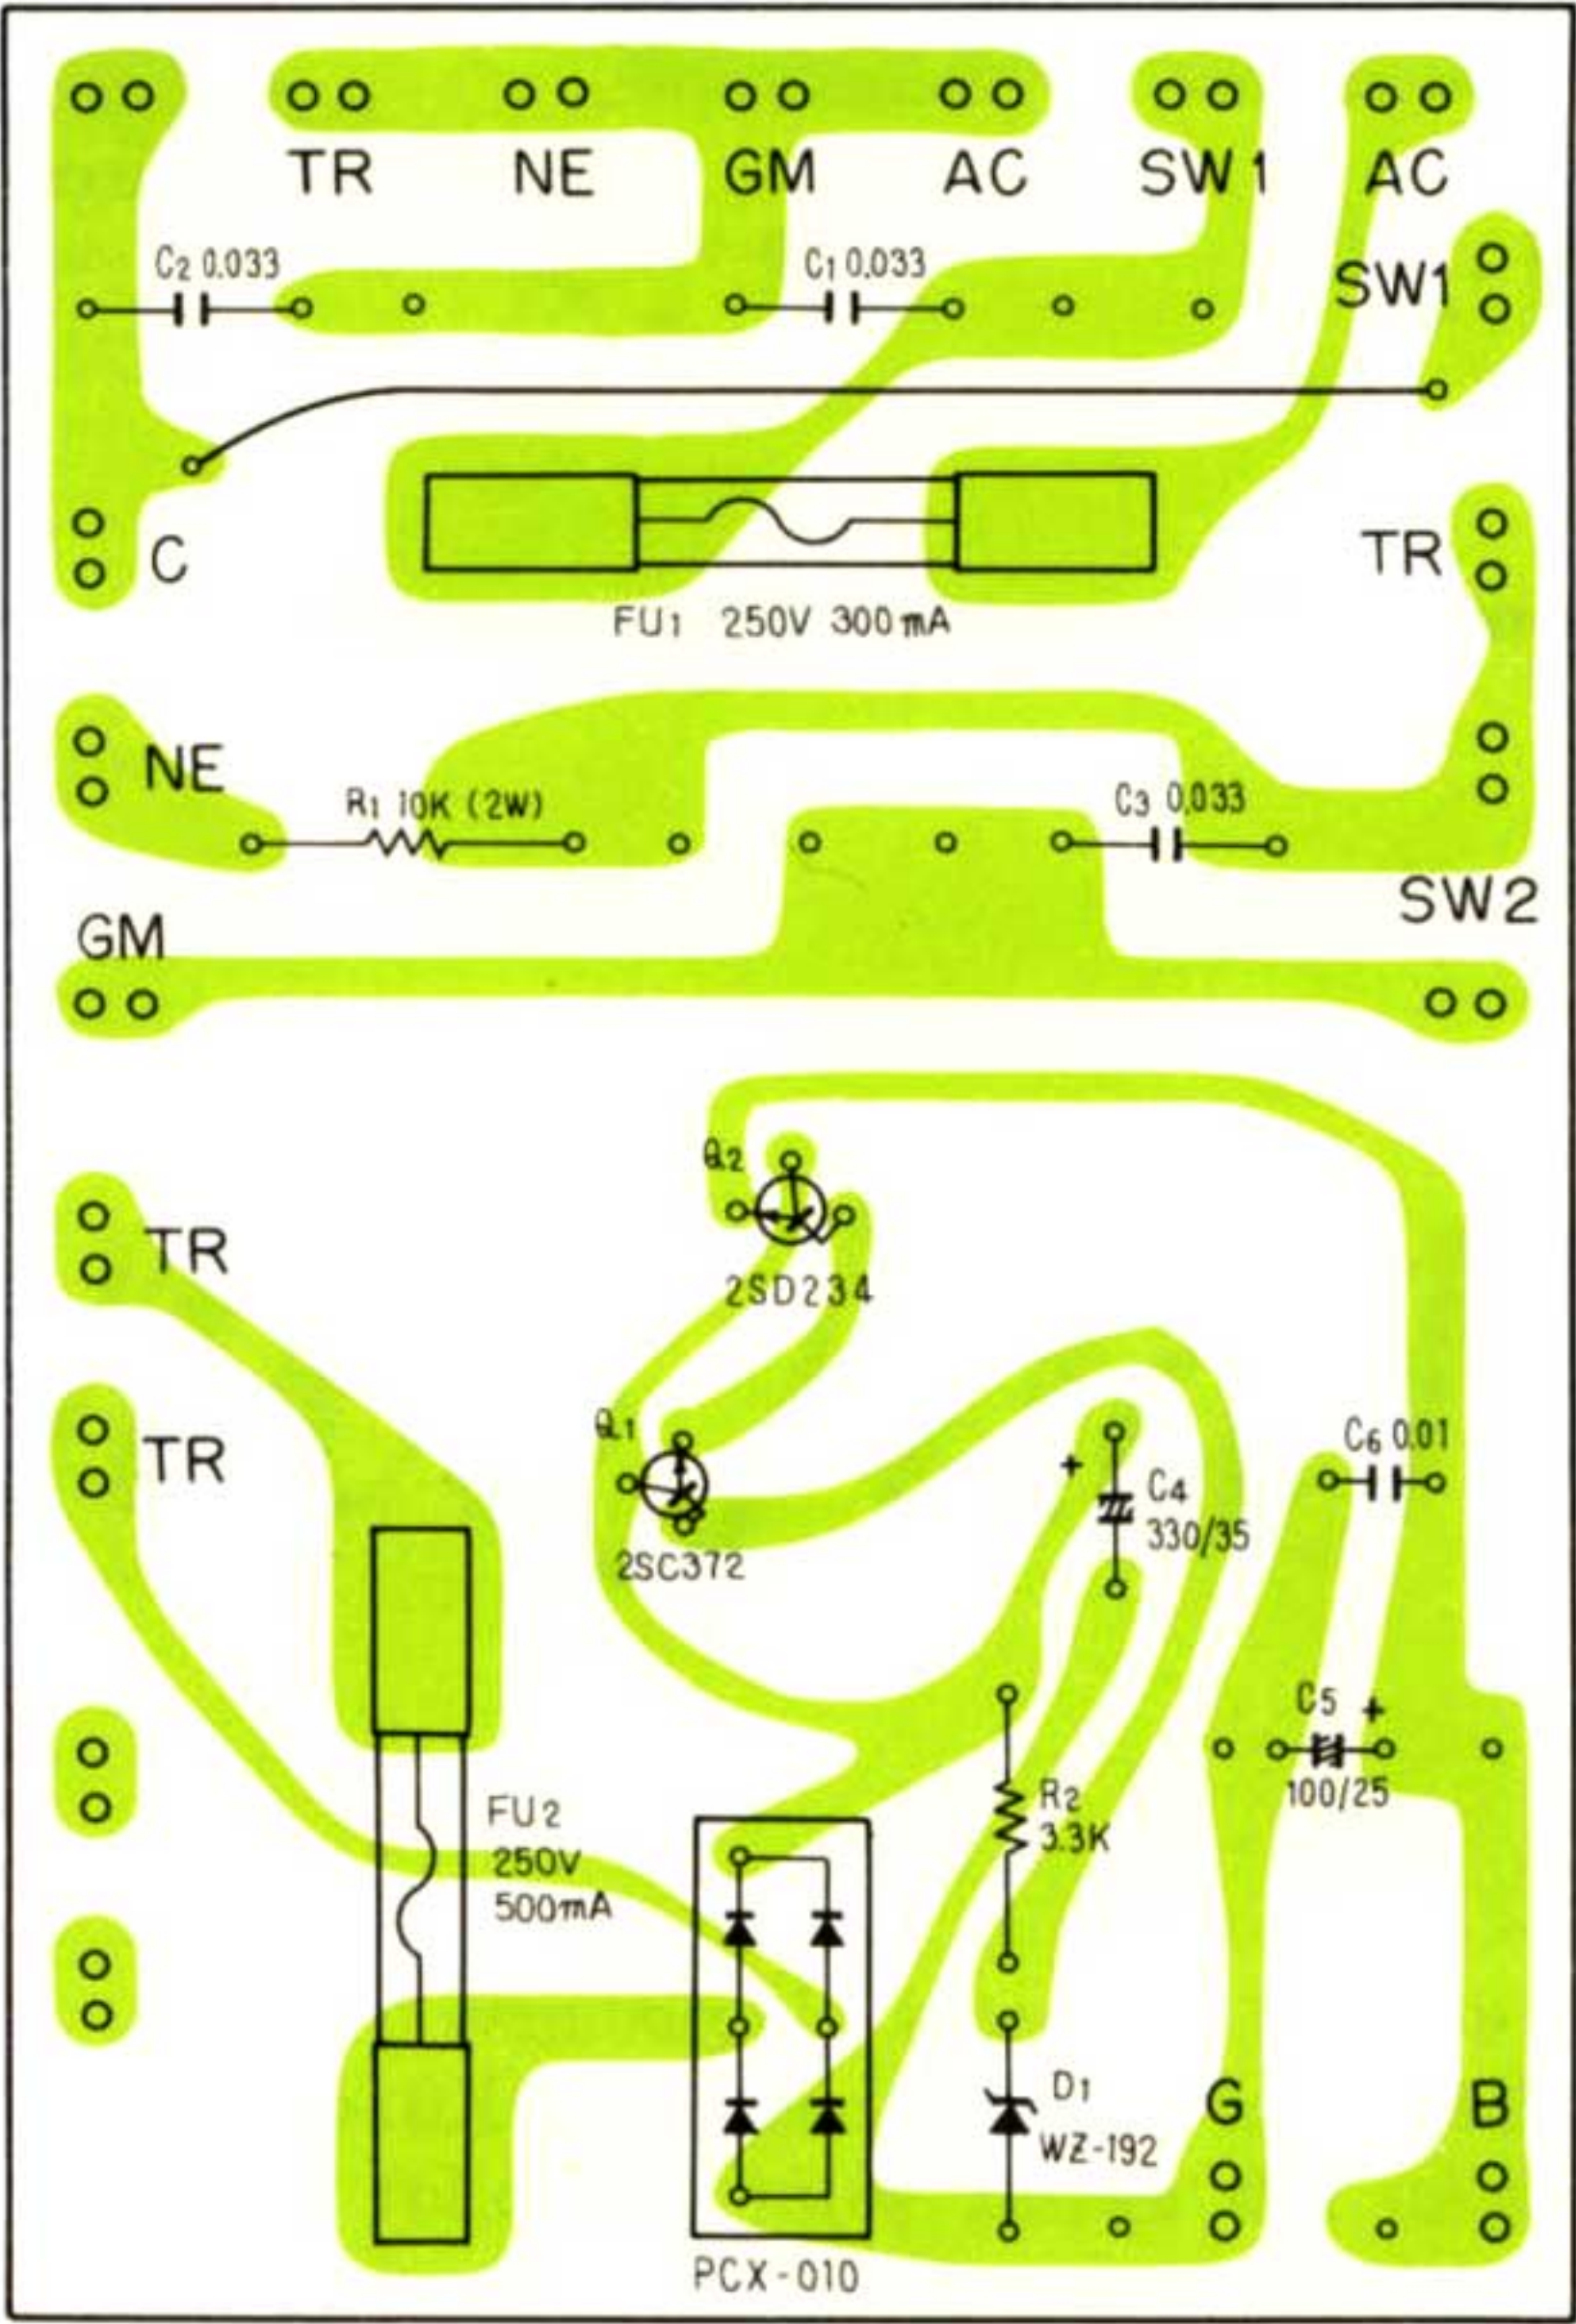

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SD234
Q2	Transistor	2SC372-Y or 2SC945-P
D1	Bridge rectifiers Zener diode	PCX-010 WZ-192 or RD18E

CAPACITORS

Symbol	Description	Part No.
C1	Ceramic 0.033 250V	PCL-004
C2	Ceramic 0.033 250V	PCL-004
C3	Ceramic 0.033 250V	PCL-004
C4	Electrolytic 330 35V	CEA 331P 35
C5	Electrolytic 100 25V	CEA 101P 25
C6	Ceramic 0.01 50V	CKDYF 103Z 50

RESISTORS

Symbol	Description	Part No.
R1	Metal oxide 10k 2W	RS2P 103J
R2	Carbon film 3.3k	RD¼PS 332J

OTHERS

Symbol	Description	Part No.
FU1	Fuse 300mA	AEK-023
FU2	Fuse 500mA	PEK-004
	Heat sink	KNA-582
	Fuse clip	K91-006

PIONEER ELECTRONIC CORPORATION

4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153, Japan

U.S. PIONEER ELECTRONICS CORPORATION

75 Oxford Drive, Moonachie, New Jersey 07074, U.S.A.

PIONEER ELECTRONIC (EUROPE) N.V.

Luithagen-Haven 9, 2030 Antwerp, Belgium

PIONEER ELECTRONICS AUSTRALIA PTY. LTD.

178-184 Boundary Road, Braeside, Victoria 3195, Australia

Printed in Japan

NOV. 1976

<76K04Y3K01>